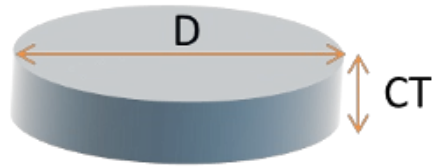


**PN: CU-330-I-Y-A****INPUT PARAMETER**

<b>Wavelength [nm]:</b>	1064
<b>Beam Mode (SM/MM):</b>	SM or MM
<b>Minimum Beam Diameter [mm]:</b>	>3

**ELEMENT PARAMETER**

<b>Element Type:</b>	Window*, must be ordered as a pair
<b>Material:</b>	Fused Silica
<b>Element Size [mm]:</b>	25.4
<b>Clear Aperture [mm]:</b>	23.6
<b>Center Thickness [mm]:</b>	3
<b>Coating:</b>	AR/AR coating

**OUTPUT PARAMETER**

<b>Ring Diameter [mrad]</b>	1.2
<b>Transmission efficiency:</b>	Close to 100%
<b>Overall Efficiency:</b>	>80% (ratio dependent)
<b>Zero-Order adjustable range [%]:</b>	0.5-100%